

Style 1 hexagon nuts with metric fine pitch thread Property classes 6 and 8

DIN
971
Part 1

Sechskantmuttern, Typ 1: metrisches Feingewinde,
Festigkeitsklassen 6 und 8

Supersedes December 1983 edition.

In keeping with current practice in standards published by the International Organization for Standardization (ISO), a comma has been used throughout as the decimal marker.

This standard should be used together with ISO 8673. For details, see Explanatory notes. It is intended to withdraw the present standard by 1 July 1992 at the latest.

The specified height of style 1 hexagon nuts is only adequate for property classes 6 and 8. In order to ensure full load-bearing capacity (cf. DIN 267 Part 23), fine pitch thread nuts that are to be assigned to property classes 10 and 12 are required to have the larger nut height specified for style 2 nuts in DIN 971 Part 2.


Dimensions in mm

1 Field of application

This standard specifies requirements for type 1 M8 to M39 hexagon nuts with fine pitch thread, assigned to product grade A (up to size M16) or product grade B (for sizes above M16), complying with property classes 6 and 8 as specified in DIN 267 Part 23.

If, in special cases, nuts are to comply with specifications other than those given in this standard, e.g. regarding property class, they shall be selected in accordance with the relevant standards.

2 Dimensions

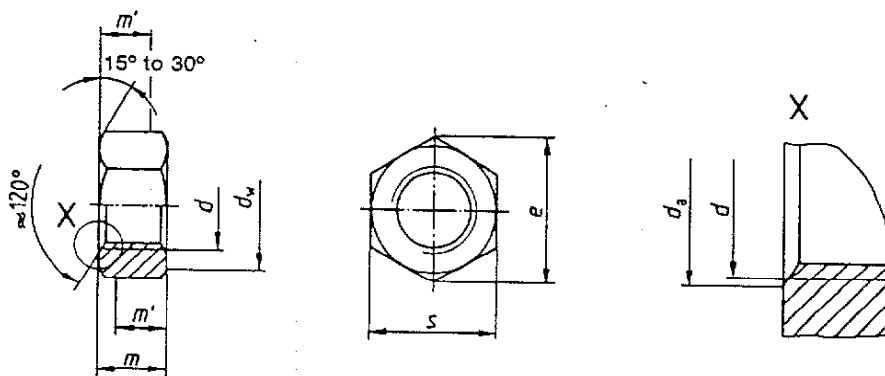

m' = minimum wrenching height (0,8 m minimum).

Continued on pages 2 to 4

Thread size (d)	M 8 × 1	M 10 × 1	M 12 × 1,5	(M 14 × 1,5)	M 16 × 1,5	(M 18 × 1,5)	M 20 × 2
	-	M 10 × 1,25	M 12 × 1,25	-	-	(M 18 × 2)	M 20 × 1,5
d_n min.	8	10	12	14	16	18	20
d_n max.	8,75	10,8	13	15,1	17,3	19,4	21,6
d_w min.	11,6	14,6	16,6	19,6	22,5	24,9	27,7
e min.	14,38	17,77	20,03	23,36	26,75	29,56	32,95
m max. = nominal size	6,8	8,4	10,8	12,8	14,8	15,8	18
m min.	6,44	8,04	10,37	12,1	14,1	15,1	16,9
m' min.	5,15	6,43	8,3	9,68	11,28	12,08	13,52
$s^1)$ max. = nominal size	13	16	18	21	24	27	30
$s^1)$ min.	12,73	15,73	17,73	20,67	23,67	26,16	29,16

Thread size (d)	(M 22 × 1,5)	M 24 × 2	(M 27 × 2)	M 30 × 2	(M 33 × 2)	M 36 × 3	(M 39 × 3)
	(M 22 × 2)	-	-	-	-	-	-
d_n min.	22	24	27	30	33	36	39
d_n max.	23,8	25,9	29,2	32,4	35,6	38,9	42,1
d_w min.	31,4	33,2	38	42,7	46,6	51,1	55,9
e min.	37,29	39,55	45,2	50,85	55,37	60,79	66,44
m max. = nominal size	19,4	21,5	23,8	25,6	28,7	31	33,4
m min.	18,1	20,2	22,5	24,3	27,4	29,4	31,8
m' min.	14,48	16,16	18	19,44	21,92	23,52	24,32
s max. = nominal size	34	36	41	46	50	55	60
s min.	33	35	40	45	49	53,8	58,8

Sizes in brackets should be avoided where possible.

¹⁾ As a deviation from ISO 4759 Part 1, the minimum values given for tolerance zone h14 shall be permissible for the width across flats of hot dip galvanized M16 × 1,5 nuts.

3 Technical delivery conditions

Material		Steel
General requirements		As specified in DIN 267 Part 1.
Thread	Tolerance	6H ¹⁾
	As specified in	DIN 13 Parts 12 and 15.
Mechanical properties	Property class (material)	6 or 8
	As specified in	DIN 267 Part 23.
Limit deviations, geometrical tolerances	Product grade	For sizes up to M16: A; for larger sizes: B.
	As specified in	ISO 4759 Part 1.
Surface finish		As processed. DIN 267 Part 2 shall apply with regard to surface roughness. DIN 267 Part 21 shall apply with regard to the widening test. DIN 267 Part 20 shall apply with regard to permissible surface discontinuities. DIN 267 Part 9 shall apply with regard to electroplating. ¹⁾ DIN 267 Part 10 shall apply with regard to hot dip galvanizing.
Acceptance inspection		DIN 267 Part 5 shall apply with regard to acceptance inspection.

¹⁾ Where a protective coating is applied, e.g. an electroplated coating complying with DIN 267 Part 9, depending on the coating thickness required, it may be necessary, particularly in the case of tolerance class 6H nuts, to select a larger fundamental deviation than that assigned to the H position (see DIN 267 Part 9). This, however, might impair the resistance of the bolt/nut assembly to stripping.

4 Designation

Designation of a style 1 M12 × 1,5 hexagon nut assigned to property class 8:

Hexagon nut DIN 971 – 1 M12 × 1,5 – 8

If product grade A is required for sizes above M16, the product grade shall be included in the designation, e.g.:

Hexagon nut DIN 971 – 1 M24 × 2 – 8 – A

In such a case, the relevant tolerances as specified in ISO 4759 Part 1 shall apply.

The DIN 4000–2–7 tabular layout of article characteristics shall apply for nuts covered in this standard.

5 Mass

The values of mass given are for guidance only.

Thread size (d)	M 8 × 1	M 10 × 1	M 12 × 1,5	M 14 × 1,5	M 16 × 1,5	M 18 × 1,5	M 20 × 2
	–	M 10 × 1,25	M 12 × 1,25	–	–	M 18 × 2	M 20 × 1,5
Mass (7,85 kg/dm ³) per 1000 units, in kg, ≈	5,4	10,6	16,3	26,4	38	52	73

Thread size (d)	M 22 × 1,5	M 24 × 2	M 27 × 2	M 30 × 2	M 33 × 2	M 36 × 3	M 39 × 3
	M 22 × 2	–	–	–	–	–	–
Mass (7,85 kg/dm ³) per 1000 units, in kg, ≈	104	125	178	238	320	420	520

Standards referred to

DIN 13 Part 12	ISO metric screw threads; coarse and fine pitch threads with diameters from 1 to 300 mm; selection of diameters and pitches
DIN 13 Part 15	ISO metric screw threads; fundamental deviations and tolerances for screw threads of 1 mm diameter and larger
DIN 267 Part 1	Fasteners; technical delivery conditions; general requirements
DIN 267 Part 2	Fasteners; technical delivery conditions; types of finish and dimensional accuracy
DIN 267 Part 5	Fasteners; technical delivery conditions; acceptance inspection (modified version of ISO-3269, 1984 edition)
DIN 267 Part 9	Fasteners; technical delivery conditions; electroplated components
DIN 267 Part 10	Fasteners; technical delivery conditions; hot dip galvanized components
DIN 267 Part 20	Fasteners; technical delivery conditions; surface irregularities on nuts
DIN 267 Part 21	Fasteners; technical delivery conditions; widening test for nuts
DIN 267 Part 23	Fasteners; technical delivery conditions; property classes for nuts with fine pitch thread (ISO classes)
DIN 4000 Part 2	Tabular layout of article characteristics for bolts, screws and nuts
ISO 4759 Part 1	Tolerances for fasteners: bolts, screws and nuts with thread diameters $\geq 1,6$ and ≤ 150 mm; product grades A, B and C

Other relevant standard

DIN 971 Part 2	Style 2 hexagon nuts with metric fine pitch thread; property classes 10 and 12
----------------	--

Previous edition

DIN 971 Part 1: 12.83.

Amendments

The following amendments have been made to the December 1983 edition.

- A note on the period of validity of this standard has been included.
- Thread size M 18 × 2 has been identified as being obsolescent.

Explanatory notes

For more than 20 years efforts have been directed towards the achievement of the international interchangeability of fasteners by preparing international standards for the product concerned. ISO Standards have now been published for the most important types of fasteners (see ISO Standards Handbook 18).

However, international efforts only serve a useful purpose if national standards are adapted as far as possible to international standards, or, ideally, replaced by them. Current DIN Standards already agree in substance with the relevant ISO Standards, but still differ in some respects, as for instance in the widths across flats for hexagon products.

The Federal Republic of Germany adopted International Standard ISO 272 on widths across flats as national standard DIN ISO 272 in October 1979. Nevertheless, widths across flats deviating from DIN ISO 272 are still being used in Germany for nominal sizes M 10, M 12, M 14 and M 22. The table below compares the previous widths across flats with the new ones specified for the four nominal sizes referred to.

Thread size	M 10	M 12	M 14	M 22
Previous width across flats, in mm	17	19	22	32
New width across flats as in ISO 272, in mm	16	18	21	34

The manufacturers and users of hexagon products participating in the work of the *Normenausschuß Mechanische Verbindungselemente* (Fasteners Standards Committee), together with representatives of the dealers in fasteners, have decided to introduce the new widths across flats in all relevant product standards. Since experience has shown, that the introduction of the new widths across flats has not been advanced by their inclusion in DIN Standards merely as preferred alternatives to the previous widths across flats, the following decisions have been reached to accelerate the changeover procedure.

Supplementary to current DIN Standards specifying the previous widths across flats, DIN ISO Standards dealing with the same products will, wherever ISO Standards are

available, be published which, besides introducing a number of other minor amendments, will specify the new widths across flats conforming to ISO 272. In both DIN and DIN ISO Standards attention will be drawn to the fact that the relevant ISO Standards are to be preferred and that the DIN Standard is to be replaced after a transition period of 5 years.

If no relevant ISO Standard is available, the DIN Standard will contain a foreword stating that the previous width across flats specifications are to be withdrawn after a transition period of 5 years and replaced by those specified in ISO 272.

This sets a time limit for both manufacturer and user of hexagon products by which the changeover to the new widths across flats must be effected. The responsible committee is of the opinion, that it will still be possible after this period to obtain fasteners complying with the superseded specifications as spare parts.

In some cases, the replacement of the previous DIN Standards by the relevant ISO Standards will have further consequences, besides the changeover to the new widths across flats, attention being drawn to this circumstance in the national foreword of the relevant DIN ISO Standards. These consequences result from the fact that the ISO Standards have not yet reached the same level of completeness as the DIN Standards. Thus a number of nominal sizes, as well as several product specifications for fine pitch threads are not found in the ISO product standards. Furthermore, ISO Standards on technical delivery conditions are still in the initial stages, so that specific requirements are still subject to separate agreement when ordering products in accordance with ISO Standards, as they are not included in the designation for order purposes.

Besides these consequences, which are of importance when applying the new ISO Standards, the amendment of the widths across flats also has a number of consequences as regards the use of the new products which the designer must take into consideration. Besides the amended assembly sizes, this applies above all to the different surface pressure for the bearing area of the nut or the heads of the bolts. These difficulties are discussed in Recommendation VDA 262*) published by the *Verband der Automobilindustrie e.V.* (German Automobile Manufacturers Association).

International Patent Classification

F 16 B 37/00

*) Obtainable from: *Dokumentation Kraftfahrzeugwesen e.V.*, Grönerstraße 5, D-7140 Ludwigsburg.